




Fingerprint



C71

**Mobile Computer
Fingerprint**

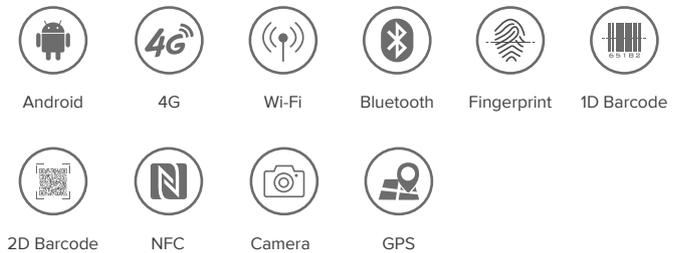

Chainway C71 is an Android rugged mobile computer. It is improved to enable capacitive fingerprint sensor TCS1, TLK1NC02 and optical sensor CBM-E3. C71 is revolutionized to be FIPS 201 compliant, and enable secure data encryption and fake finger detection. C71 with biometric functions can best satisfy your needs of identity verification. C71 is ideal for popuLatin census and national election.



Specification

Performance

| | |
|-------------------------|--|
| CPU | Octa-core, 2.3GHz |
| RAM+ROM | 3GB + 32GB / 4GB + 64GB (optional) |
| Expansion | Supports up to 256GB Micro SD (TF) card |
| Operating System | Android 11 / 13; GMS, FOTA, Soti MobiControl, SafeUEM supported. |

Communication

| | |
|------------------|--|
| WLAN | IEEE802.11 a/b/g/n/ac, 2.4G/5G dual-band, internal antenna |
| WWAN | 2G: GSM850/GSM900/DCS1800/PCS1900 |
| | 3G: WCDMA: B1/B2/B4/B5/B8 CDMA2000 EVDO: BCO TD-SCDMA: A/F |
| | 4G: B1/B2/B3/B4/B5/B7/B8/B12/B17/B20/B28A/B28B/ B34/B38/B39/B40/B41 |
| Bluetooth | Bluetooth 5.0 |
| GNSS | GPS/AGPS, GLONASS, BeiDou; internal antenna |

Physical Characteristics

| | |
|-----------------------|---|
| Dimensions | 164.2 x 78.8 x 17.5 mm / 6.46 x 3.1 x 0.69 in. ; (Capacitive the thickest: 24.5 mm / 0.96 in.) ; (Optical the thickest: 31.5 mm / 1.24 in.) |
| Weight | 314 g / 11.08 oz. |
| Display | 5.2" IPS LTPS 1920 x 1080 |
| Touch Panel | Corning Gorilla Glass, multi-touch panel, gloves and wet hands supported |
| Power | Main battery: Li-ion, rechargeable, 5000 mAh |
| | Standby: over 350 hours |
| | Continuous use: over 12 hours (depending on user environment) |
| | Charging time: 3-4 hours (with standard adaptor and USB cable) |
| Expansion Slot | 1 slot for Nano SIM card, 1 slot for Nano SIM or TF card |
| Interfaces | USB 2.0 Type-C, OTG, Type-C headphones supported |
| Sensors | Light sensor, proximity sensor, gravity sensor |
| Notification | Sound, LED indicator, vibrator |
| Audio | 2 microphones, 1 for noise cancellation; 1 speaker; receiver |
| Keypad | 4 front keys, 1 power key, 2 scan keys, 1 multifunctional key |

Developing Environment

| | |
|-----------------|-----------------------------------|
| SDK | Chainway Software Development Kit |
| Language | Java |
| Tool | Eclipse / Android Studio |

User Environment

| | |
|-----------------------------|--|
| Operating Temp. | -4°F to 122°F / -20°C to 50°C |
| Storage Temp. | -40°F to 158°F / -40°C to 70°C |
| Humidity | 5% RH - 95% RH non condensing |
| Drop Specification | Multiple 1.8 m / 5.91 ft. drops (at least 20 times) to the concrete across the operating temperature range |
| Tumble Specification | 1000 x 0.5 m / 1.64 ft. falls at room temperature |
| Sealing | IP65 / IP67 per IEC sealing specifications |
| ESD | ±15 KV air discharge, ±6 KV conductive discharge |

Data Collection

Fingerprint

Option 1

| | |
|------------------------------|---|
| Sensor | TCS1 Capacitive |
| Sensing Area (mm) | 12.8 x 18.0 |
| Resolution (dpi) | 508 dpi, 8-bit greylevel |
| Certifications | FIPS 201, STQC |
| Format Extraction | ISO 19794, WSQ, ANSI 378, JPEG2000 |
| Fake Finger Detection | Support by SDK |
| Security | AES, DES key encryption of the host communication channel |

Option 2

| | |
|------------------------------|---|
| Sensor | TLKINC02 |
| Sensing Area (mm) | 14.0 x 22.0 |
| Resolution (dpi) | 508dpi, 256 greylevel |
| Certifications | FIPS 201, FBI |
| Format Extraction | ISO19794, WSQ, ANSI 378, JPEG2000 |
| Fake Finger Detection | Support by SDK |
| Security | AES, DES key encryption of the host communication channel |

Option 3

| | |
|------------------------------|---|
| Sensor | Optical Morpho CBM-E3 |
| Sensing Area (mm) | 14 x 22 |
| Resolution (dpi) | 500 dpi, 256 greylevel |
| Certifications | FIPS PIV IQS / ISO 19794-4, MINEX & FIPS 201 compliant, STQC |
| Format Extraction | ISO 19794-2/4, WSQ, ANSI 378, etc. |
| Fake Finger Detection | Latex, GeLatin, Plasticine, Kapton, Transparent Film, Silicone, Rubber, Play-doh, Graphite Or Paper |
| Security | FIPS 140-2 level 2, multiple security methods available, including image and templates encryption, template signature, secure tunneling, etc. |

Camera

| | |
|--------------------------------|--|
| Rear Camera | 13 MP Autofocus with flash Facial Recognition ISO19794-5 Compatible |
| Front Camera (optional) | 5 MP camera |

NFC

| | |
|------------------|---|
| Frequency | 13.56 MHz |
| Protocol | ISO14443A/B, ISO15693, NFC-IP1, NFC-IP2, etc. |
| Chips | M1 card (S50, S70), CPU card, NFC tags, etc. |
| Range | 2-4 cm |

Barcode Scanning (optional)

| | |
|--------------------------|---|
| 1D Linear Scanner | Honeywell: N4313 |
| 1D Symbologies | UPC/EAN, Code128, Code39, Code93, Code11, Interleaved 2 of 5, Discrete 2 of 5, Chinese 2 of 5, Codabar, MSI, RSS, etc. |
| 2D Imager Scanner | Zebra: SE4710 / SE4750SR / SE4750MR / SE4750DP; Honeywell: N6603; CM60 |
| 2D Symbologies | PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode; Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal, Dutch Postal (KIX), etc. |

Accessories

| | |
|-----------------|--------------------------------------|
| Standard | AC Adaptor, USB Cable, Lanyard, etc. |
| Optional | Cradle, Holster, etc. |

* For detailed specification, please check Accessory Guide.

Notice: Product specifications are subject to change without prior notice. / Model: C71 Fingerprint / Update Date: 2024-09-20

CHAINWAY[®]

Shenzhen Chainway Information Technology Co., Ltd

Address: 9F, Building2, Phase 2, Gaoxinqi Industrial Park, Liuxian 1st Rd., Bao'an District, Shenzhen, Guangdong 518102, China

Tel: 0086-755-23223316

Fax: 0086-755-23223310

Email: sales@chainway.cn

Web: http://www.chainway.net